

# ATC Riviera Outdoor Quartz Infrared Electric Heaters




ATC Riviera 2000W  
Infrared Heater Black




ATC Riviera 4000W  
Infrared Heater Black




ATC Riviera 6000W  
Infrared Heater Black

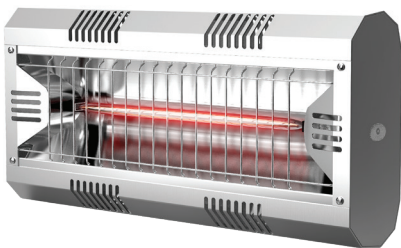

ATC Riviera 2000W  
Infrared Heater Silver

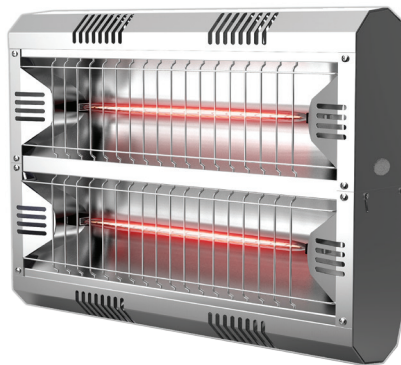

ATC Riviera 4000W  
Infrared Heater Silver

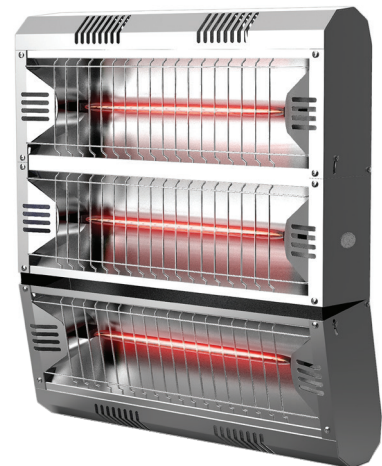

ATC Riviera 6000W  
Infrared Heater Silver

## Optional Bluetooth Heater Controller



Waterproof IP55  
**'Feel the Heat'**

See page 19

## Description

Product Code	RIV200	RIV400	RIV600
Colour	Black	Black	Black
Product Code	RIV200-SL	RIV400-SL	RIV600-SL
Colour	Silver	Silver	Silver

## Optional Heater Controller

Product Code	INFRA4400
Description	Bluetooth Infrared Heating Controller c/w IR Remote

## High Performance

The Riviera High Performance range of Outdoor Quartz Infrared electric heaters are suitable for many applications, industries and environments.

Fitted with Gold lamps the heaters provide a comfortable level of heat. The Riviera Heaters are unique in that they can be mounted on the Wall, on the Ceiling / Roof or can be Hung from a height to provide heat in unusual locations.

Available in three sizes, 2000W, 4000W and 6000W, rated IP55 Weatherproof, there is a Riviera Heater for every application.

## Product Features

- Modern Design
- Parabolic Reflector for Even Spread of Heat
- Instant Heat
- Creates Comfortable Environment
- 3 Sizes; 2000W – 4000W – 6000W
- Energy Efficient
- Multiple Mounting Heights
- Multiple Mounting options – Wall – Ceiling – Hung
- Unique adjustable design allows up to 30° of directional adjustment (4000W & 6000W Versions)
- Suitable for Commercial – Industrial Applications
- Maintenance Free
- Easy to Install
- IP55 Weatherproof



**Saving Energy  
Reducing the  
Carbon Footprint**



**2  
YEAR  
WARRANTY**

# ATC Riviera Outdoor Quartz Infrared Electric Heaters

## Technical Details

### Description

Model	Riviera 2000W	Riviera 4000W	Riviera 6000W
Product Code	RIV200   RIV200-SL	RIV400   RIV400-SL	RIV600   RIV600-SL
Colour	Black   Silver	Black   Silver	Black   Silver

### Electrical Specifications

Power output (Watts)	2000	4000	6000
Voltage	220-240	220-240	220-240
Frequency (Hertz)	50-60	50-60	50-60
Current (Amps)	9	18	3 x 9
Lamps	1	2	3
Lamp Arrangement	Single	Stacked Vertically	Stacked Vertically
Lamp Type	Gold	Gold	Gold
Lamp Life <sup>1</sup>	5000 hrs	5000 hrs	5000 hrs
<sup>1</sup> Lamp life is extended by approximately 25% when used with a soft start controller (see INFRA-4400 p.17)			
Emission	IR-A	IR-A	IR-A

### Mounting and Installation

Installation	Wall/Ceiling/Hanging	Wall/Ceiling/Hanging	Wall/Ceiling/Hanging
Mounting height	2.5-3	3-4	3-4
Heating Area (M <sup>2</sup> * @45°)	10	24	32
Heating Area (M <sup>2</sup> * when hung)	10 @ 3m	32 @ 4m	48 @ 4m
Minimum cable size	3 x 1.5 <sup>2</sup>	3 x 2.5 <sup>2</sup>	5 x 1.5 <sup>2</sup>
Supplied with or without cable	Without	Without	Without
Lamps switchable or all together	N/A	All Together	All Together
Dimmable ( With controller)	Yes	Yes	Yes
With/without grill	With	With	With

### Dimensions & Weight

Dimensions ( HxWx D) mm	235x496x313	375x496x313	515x496x313
Weight (Kg - Nett)	2.2	3.0	3.8
IP Rating	IP55	IP55	IP55

### Approvals

Certifications	CE, IMQ	CE, IMQ	CE, IMQ
----------------	---------	---------	---------



Hotels



Restaurants



Pubs



Sports Facilities



Stadia




Factories



Warehouses


# Heating Area m<sup>2</sup>

## Wall Mounted 45°

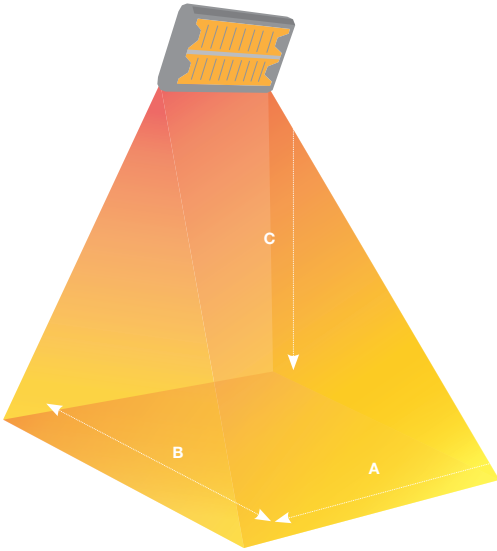


Model	Wall Mounted 45°		
	A	B	C
RIV200	5	2	3
RIV400	8	3	4
RIV600	8	4	4

## Ceiling Mounted

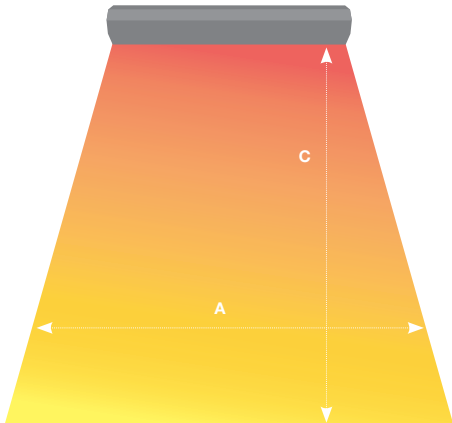

Side View

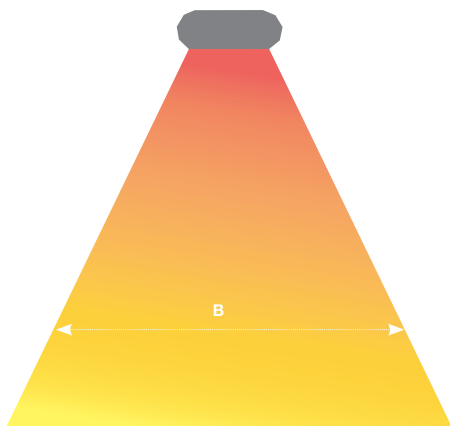

End View

Model	Ceiling Mounted		
	A	B	C
RIV200	5	2	3
RIV400	8	4	4
RIV600	8	6	4

**It is recommended to install Outdoor radiant heaters protected from strong breezes or crosswinds. Based on average ambient temperature of 10°C.**